


The drawings, specifications or descriptions contained herein, together with all information and know-how disclosed thereby, include technical data which is the exclusive property of Inyo Process. No disclosure to others, either in the United States or abroad, or reproduction of any part of the information supplied is to be made, and no manufacture, sale or use of any device, process or composition of matter disclosed therein, whether patented or not, shall be made except by written authorization of Inyo Process. This notice is not intended to nullify or limit rights granted by contract.

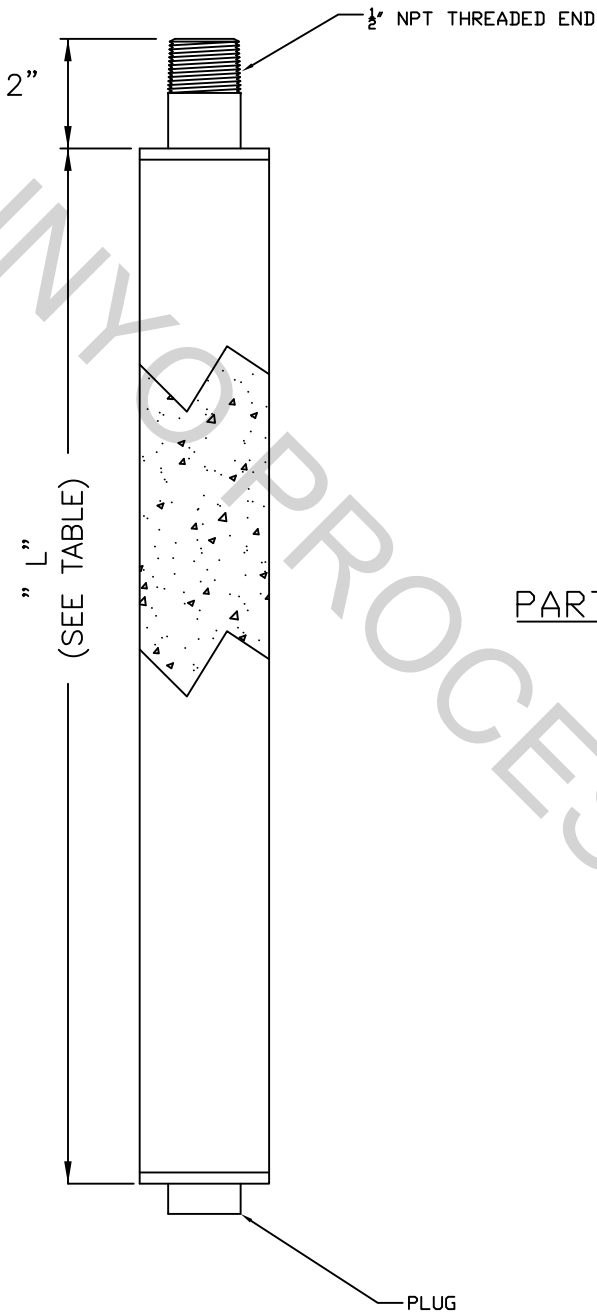

POROUS SPARGER DIMENSIONS	
CONNECTION THREAD (NPT)	SPARGER O.D. (in)
1/2"	1-1/2"

MATERIAL OF CONSTRUCTION	316L SS
--------------------------	---------

PART NUMBER EXAMPLE "PMET15S10"

PMET15 S 10

QUILL MAT'L	CODE	LENGTH "L" (in)
316L S.S.	S	3
		6
		10

NOTE:
FOR SPARGERS OVER 10' LONG
USE THE 'PMT15' DATA SHEET
THAT HAS AN INTERNAL
SUPPORT TUBE.

UNLESS OTHERWISE SPECIFIED	PROJECT NO.	-			INYO PROCESS				
	DIMENSIONS ARE IN INCHES DO NOT SCALE DRAWING	DRAWN	DG 5-29-12						
DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994 AND APPLICABLE STANDARDS	CHECKED	-			1-1/2" POROUS SPARGER-MALE NPT END, 316L SS-NO SUPPORT TUBE				
	DESIGN APPROVED	-							
DECIMALS .XX ±.030 .XXX ±.010	ANGLES ±1°	SURFACE ROUGHNESS 125 ✓	MFG. APPROVED	-		SIZE A	CAGE CODE -	DRAWING NO PMET15	REV -
RUNOUT .010_TIR BREAK CORNERS .005-.015 INTERNAL RADII .015-.030	QA APPROVED	-		RELEASE DATE	-		SCALE	WEIGHT	SHEET

FILE NAME: -