


The drawings, specifications or descriptions contained herein, together with all information and know-how disclosed thereby, include technical data which is the exclusive property of Inyo Process. No disclosure to others, either in the United States or abroad, or reproduction of any part of the information supplied is to be made, and no manufacture, sale or use of any device, process or composition of matter disclosed therein, whether patented or not, shall be made except by written authorization of Inyo Process. This notice is not intended to nullify or limit rights granted by contract.

## 1/2" POROUS SPARGER DIMENSIONS WITH TUBING END

POROUS SPARGER DIMENSIONS	
TUBING SIZE	SPARGER O.D. (in)
1/4"	0.5"

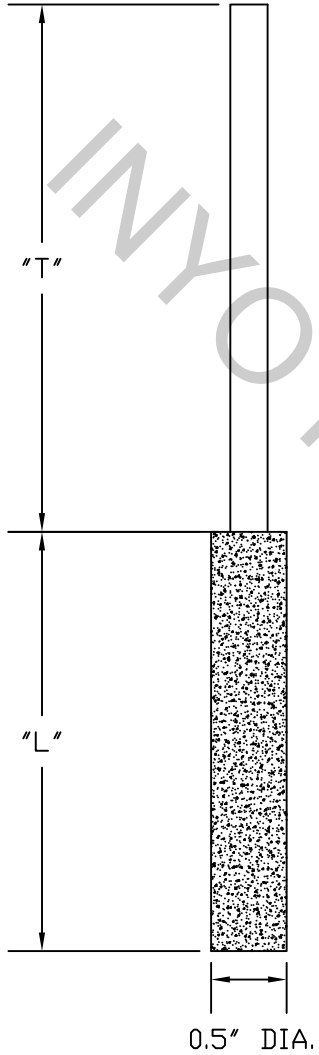

PART NUMBER EXAMPLE "PMTU5S4T12"

PMTU5 S 4 T 12

QUILL MAT'L	CODE
316L S.S.	S

POROUS SPARGER LENGTH "L" (in)
1
2
3
4
5
6
7
8
9
10

TUBING LENGTH "T" (in)
2
6
12
18
24

UNLESS OTHERWISE SPECIFIED		INYO PROCESS	
DIMENSIONS ARE IN INCHES DO NOT SCALE DRAWING		DRAWN DBA	WWW.INYOPROCESS.COM
DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994 AND APPLICABLE STANDARDS		CHECKED ET	1/2" DIAMETER POROUS SPARGERS WITH TUBING END
DECIMALS .XX ±.030 .XXX ±.010	ANGLES ±1°	DESIGN APPROVED	
SURFACE ROUGHNESS 125 ✓		MFG. APPROVED	
RUNOUT .010_TIR BREAK CORNERS .005-.015 INTERNAL RADII .015-.030		QA APPROVED	
RELEASE DATE 5-4-2010		SIZE A	DRAWING NO PMTU-001
		SCALE -	REV -
		SHEET 1 OF 1	